

Lexmark C534n



LEXMARK[™]

Lexmark C534n

The Lexmark C534n network-ready color laser printer has a 625 MHz processor and 256MB of memory standard, and prints at up to 24 ppm black or up to 22 ppm color.



Lexmark C534n, C534dn, C534dtn

In the Box

Lexmark C534n

- Lexmark C534n Printer
- 6,000-page Black, Cyan, Magenta & Yellow Return Program Starter Toner Cartridges¹
- Photoconductor Units Installed
- Power Cord & Setup Sheet

- Drivers and Publications CD
- Supplies Program Flier

Lexmark C534dn

- Lexmark C534n PLUS Automatic two-sided printing

Lexmark C534dtn

- Lexmark C534dtn PLUS 550-sheet drawer

Product Specifications

Part Number	US/Canada: C534n: 34A0050; C534dn: 34A0150; C534dtn: 34A0200
Product Class	Small to medium workgroup color laser printer, calibrated for PANTONE™ solid color simulation
Speed	Black: Up to 24 ppm; Color: Up to 22 ppm
Time to First Page	Black: As fast as 10.5 seconds; Color: As fast as 11 seconds
Print Resolution	4800 Color Quality, 1200 x 1200 dpi
Processor	C534n: 500 MHz; C534dn, C534dtn: 625 MHz
Memory (std./max.)	C534n: 128MB/640MB; C534dn, C534dtn: 256MB/768MB
Connectivity*	
Standard	USB, Ethernet, 1 ISP, USB Direct Interface
Optional	Parallel, Serial, Wireless, Gigabit Ethernet, Fiber Optic
Printer Languages	PostScript 3 and PCL 6 emulations; PPDS Migration Tool
Direct Print formats	PDF v1.5, GIF, PNG, BMP, PCX, DCX, JPEG, TIFF, HTML 4.0
Fonts*	PCL: 89 scalable, 2 bitmapped (includes OCR-A, OCR-B and Code 3 of 9 bar codes); PostScript: 91; PPDS: 39 scalable, 5 bitmapped
Operating Systems*	Windows, Linux, UNIX, Mac, NetWare, and O/S 400
Acoustics	51 dBA printing; 31 dBA idle
Size (WxDxH)	C534n, C534dn: 17.3 in. x 16.1 in. x 19 in. (440 mm x 408 mm x 484 mm); C534dtn: 17.3 in. x 22 in. x 24 in. (440 mm x 558 mm x 610 mm)
Weight	C534n: 57 lb. (25.9 kg); C534dn: 59 lb. (26.6 kg); C534dtn: 64 lb. (29 kg)
Duty Cycle	Up to 100,000 pages per month (Maximum one-time monthly usage)

Media Specifications

Paper Capacity (sheets)	
Standard	C534n, C534dn: Input: 350 (250 + 100); Output: 250 C534dtn: Input: 900 (250 + 550 + 100); Output: 250
Maximum	Input: 900 (250 + 550 + 100); Output: 250
Paper Sources	
Standard	C534n, C534dn: Input: 2; Output: 1; C534dtn: Input: 3; Output: 1
Maximum	Input: 3; Output: 1
Media Information	
Types	Plain paper, recycled paper, glossy paper, paper labels, card stock, transparencies, envelopes
Size	Letter, legal, A4, A5, JIS B5, executive, statement, folio, universal (3 x 4.88 in. to 8.5 x 14 in.), envelopes (7 3/4, 9, 10, DL, C5, B5), other (4.125 x 8.27 in. to 8.5 x 14 in.)
Weight	Plain paper: 16 to 58 lb. (60 to 218 g/m ²); Card stock: Up to 90 lb. Index (163 g/m ²)

Shipping Dimensions

Lexmark C534n, C534dn


Size: 21.8 x 24.9 x 22.4
Weight: 67.5 lb.

Lexmark C534dtn

Size: 22.2 x 25.4 x 30.5
Weight: 78.3 lb.

Part Numbers

Supplies	7,000-page Cyan Extra High Yield Return Program Toner Cartridge ¹	C5340CX
	7,000-page Magenta Extra High Yield Return Program Toner Cartridge ¹	C5340MX
	7,000-page Yellow Extra High Yield Return Program Toner Cartridge ¹	C5340YX
	7,000-page Cyan Extra High Yield Toner Cartridge ¹	C5342CX
	7,000-page Magenta Extra High Yield Toner Cartridge ¹	C5342MX
	7,000-page Yellow Extra High Yield Toner Cartridge ¹	C5342YX
	8,000-page Black High Yield Return Program Toner Cartridge ¹	C5240KH
	5,000-page Cyan High Yield Return Program Toner Cartridge ¹	C5240CH
	5,000-page Magenta High Yield Return Program Toner Cartridge ¹	C5240MH
	5,000-page Yellow High Yield Return Program Toner Cartridge ¹	C5240YH
	8,000-page Black High Yield Toner Cartridge ¹	C5242KH
	5,000-page Cyan High Yield Toner Cartridge ¹	C5242CH
	5,000-page Magenta High Yield Toner Cartridge ¹	C5242MH
	5,000-page Yellow High Yield Toner Cartridge ¹	C5242YH
	4,000-page Black Return Program Toner Cartridge ¹	C5220KS
	3,000-page Cyan Return Program Toner Cartridge ¹	C5220CS
	3,000-page Magenta Return Program Toner Cartridge ¹	C5220MS
	3,000-page Yellow Return Program Toner Cartridge ¹	C5220YS
	4,000-page Black Toner Cartridge ¹	C5222KS
	3,000-page Cyan Toner Cartridge ¹	C5222CS
	3,000-page Magenta Toner Cartridge ¹	C5222MS
	3,000-page Yellow Toner Cartridge ¹	C5222YS
	Photoconductor Unit (up to 20,000 pages)	C53030X
Photoconductor Unit Multi-Pack	C53034X	
Waste Toner Box (up to 25,000 pages)	C52025X	
Transfer Belt Maintenance Kit	40X3572	
115V Fuser Maintenance Kit	40X3569	
Memory Options	128MB SDRAM	13N1523
	256MB SDRAM	13N1524
	512MB SDRAM	13N1526
	32MB Flash Card	1021208
	64MB Flash Card	1021209
Warranty*	1-year Onsite Repair	Base
	1-year Onsite Repair extended warranty	2348626
	2-year Onsite Repair extended warranty	2348627
	3-year Onsite Repair extended warranty	2348628

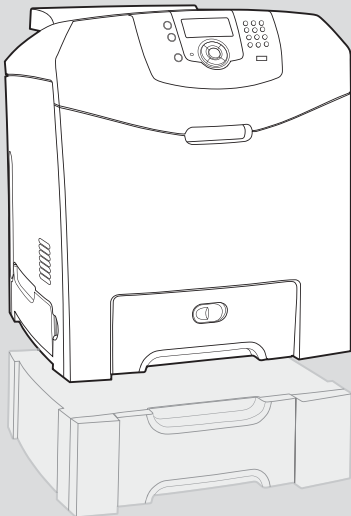

—100-sheet Multipurpose Feeder (standard)

—250-sheet Drawer (standard)

—550-sheet Drawer (36B1600)

Additional Part Numbers

Solutions	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
	Traditional Chinese Font Card	1021242
	Japanese Font Card	1021243
	Bar Code Card	36B0140
	Forms Card	36B0144
	PrintCryption Card	36B0147
Connectivity	External Print Servers	
	Lexmark MarkNet™ N7000e Fast Ethernet - 1 port ¹	14T0230
	Lexmark MarkNet N7020e Gigabit Ethernet - 4 port ¹	14T0220
	Lexmark N4000e Print Server ¹	14T0030
	Internal Print Servers	
	Lexmark MarkNet N8020 Gigabit Ethernet - 1 port ¹	14S0200
	Lexmark MarkNet N8030 Fiber Ethernet - 4 port ¹	14S0220
	Wireless Print Adapters	
	802.11g Print Adapter	1010042
	Lexmark N4050e 802.11g Print Server	14T0145
	Lexmark MarkNet N8050 802.11g Wireless	14S0165
	Local Connections	
	Parallel 1284-B Interface Card	1021091
	RS-232C Serial Interface Card	1021092
Other Attachment Options	Parallel 1284-B Interface Card	1021091
	RS-232C Serial Interface Card	1021092
Cables	10-foot Parallel Cable	1021231
	6-foot USB Cable	1021294
Media	Professional Color Laser Transparency (letter)	12A8240
	Soft Gloss Paper (letter)	12A5950

Terms & Conditions

Lexmark, MarkNet and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett Packard Company. The USB logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2006 Lexmark International, Inc. All rights reserved.

71K1605



¹ Requires USB Connection