



Konica Minolta bizhub C3851FS/C3351 Specification & Installation Guide



KONICA MINOLTA

01/17/2017

bizhub C3851FS/C3351 Specifications

Type	Full Color Printer/Copier/Scanner
Document Holder	Stationary (mirror scanning) Types: Sheets, books (page spreads), 3-dimensional objects Size: Maximum 8.5" x 14"
Photoconductor	Organic Photoconductor
Luminous Source	Red LED
Print Method	Semiconductor laser diode scanner + electrophotographic
Developing Method	Dry-type dual component HMT
Fusing Method	Belt fusing system
Resolution	Scanning: Up to 600 x 600 dpi Copying/Printing: 1,200 x 1,200 dpi (reduced speed)
Paper	Plain Paper (60-90 gsm) Thick Paper* (91-210 gsm) Coated Paper* (100-158 gsm) Postcards*, letterhead*, colored paper, envelopes**, label sheets*, recycled paper * Up to 20 sheets (Tray 1 and Bypass). ** Up to 30 sheets from Tray 1. Up to 10 sheets from Bypass.
Paper Sizes	Bypass Tray: 4"(W) x 6"(L) to 8.5"(W) x 14"(L) Tray 1 (Universal Tray): 4"(W) x 6"(L) to 8.5"(W) x 14"(L) Trays 2 and 3 (optional): 8.5"(W) x 11"(L) to 8.5"(W) x 14"(L)
Paper Tray Capacity	Bypass Tray: 100 sheets Tray 1 (Universal Tray): 550 sheets Trays 2 and 3 (optional): 500 sheets each (add up to two)
Exit Tray Capacity	Plain Paper: 250 sheets Thick Paper: 10 sheets
Warm-up Time	20 seconds or less
Image Loss Width (All Edges)	Copy: 0.157" Print: 0.165"
First Copy	C3851FS: Full Color: 9.2 sec. or less BW: 8.3 sec. or less C3351: Full Color: 9.1 sec. or less BW: 8.1 sec. or less
Print/Copy Speed (Color/BW)	C3851FS: Plain paper/letter: 40 ppm single-sided Thick paper/letter: 20 ppm single-sided C3351: Plain paper/letter: 35 ppm single-sided Thick paper/letter: 20 ppm single-sided

Magnification Ratios	Platen: Reduce/Enlarge: 25%–400% (0.1% increments)
Multiple Copies	1 to 999
Density Control	Copy Density: Manual Density Adjustment (9 steps)
Power Requirements	120V/60 Hz
Power Consumption	1550 W or less (max.)
Dimensions	21.9" (W) x 22.9" (D) x 23.7" (H)
Memory	4.0 GB RAM (UK-211 installed) (250 GB HDD)
Weight Approx.	C3851FS: Approx. 114 lb C3351: Approx. 105 lb

Duty Cycle

C3851FS: 120,000

C3351: 96,000

The Maximum Monthly Duty Cycle describes the maximum number of pages a device can output on a monthly basis. This specification is a guideline intended to offer a comparison of durability as it relates to the entire Konica Minolta MFP and printer product line so that the appropriate device can be placed in order to meet customer needs.

Basic Configuration





Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Space Requirements

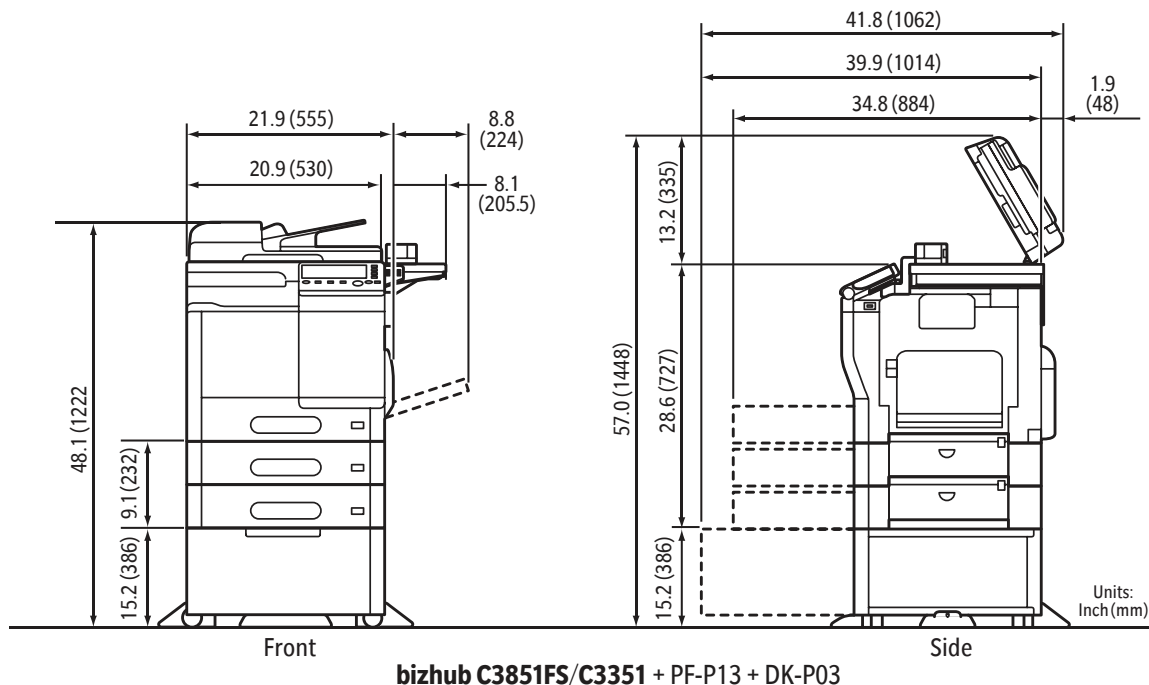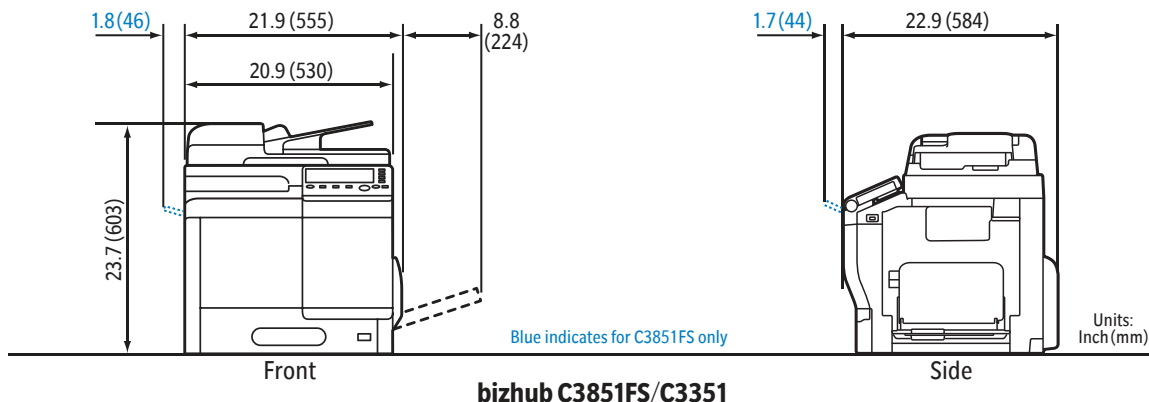


Environmental Requirements

Temperature	50°F to 86°F (operating)	
Humidity	15% to 85% (operating)	
Engine Noise	C3851FS	C3351
Printing:	≤ 72.3 dB	≤ 70.6 dB
Standby:	≤ 40.0 dB	≤ 40.0 dB
Ozone Emission	Monochrome: 1.5 mg/h or less Color: 3.0 mg/h or less	
Fusing Range	356° F (180° C)	

Electrical Requirements

Line options	Dedicated	NEMA Diagram for 5-15P
Voltage/Amperage	AC 220 to 240 V/ 7.5 Amp (50 to 60 Hz) AC 110 to 127 V/ 12.0 Amp (50 to 60 Hz)	
NEMA Part No.	5-15P	
Cord Length	6 ft.	




Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide




Component Considerations

PF-P13 Paper Feed Unit (Add up to two)



Type	500 sheet drawer (Max. 2)
Support Paper Weight	60–90 gsm
Support Paper Size	8.5" x 11" to 8.5" x 14"
Paper Capacity	500 Sheets
Power Requirements	Supplied from main body
Weight	19 lb

WT-P02 Working Table



Type	External Table
Function	For placement of off-line stapler or authentication devices. Can be used as a place holder for originals and/or output

DK-P03 Copy Desk



Type	Storage drawer only
Function	Storage of accessories, supplies, paper, etc.
Weight	37 lb
Dimensions (WxHxD)	21.9" x 22.9" x 15.2"

AU-205H IC Card Reader



Dimensions (WxHxD)	2.79" x 3.66" x 0.63"
Weight	0.25 lb
Power Supply	Supplied from USB Port
System Conditions (operating mode)	Ambient Temperature: 31° to 150° F Humidity: 5% to 95%
Card/Protocols Low Frequency (125 kHz)	HID PROX, HID Indala® Prox, EM Prox
Card/Protocols High Frequency (13.5 MHz)	CCID: MIFARE Classic™ 1K/4K, Ultra Light, Ultra Light C, Plus, MIFARE DESFire™ 0.6, MIFARE DESFire™ EV1, IC Card, iCLASS SE/ SR®, MIFARE SE™, DESFire EV1 SE, T=CL, ISO 14443 A with up to 848 kbps transmission rate (depending on card*), ISO 15693 with up to 26 kbps transmission rate (depending on card)

NOTE: WT-P02 Working Table or MK-P02 Mount Kit (internal mount) required.

*424 kbps default rate, 848 kbps configurable through web interface.

MK-P02 Mount Kit for AU-205H

Type	Mount kit/internal component
Function	Required to install AU-205H behind front panel.

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Component Considerations continued

CS-1 Convenience Stapler



Type	Standalone electronic stapler
Stapling Capacity	Up to 50 sheets
Paper Weight	Up to 90 gsm
Durability Cycle	Up to 200,000 stapling operations
Staple Position	Side or corner of document
Type of Clinch	Flat clinch
Dimensions (WxHxD)	5.31" x 5.7" x 7.48"
Weight	Approx. 3.74 lb
Power Supply	AC adaptor (supplied). Separate power output required.
Refill Staples	SK-602 (No. 505: 5,000 staples)

FS-P03 Off-Line Stapler



Type	Stapling (off-line)
Staple capacity	20 sheets (90 gsm)
Power supply	From device
Staples	SK-501
Dimensions (WxHxD)	4.3" x 4.6" x 2.9"
Weight	2.2 lb
Function	Provides finishing capabilities. Can be installed on working table WT-P02 or separately.

KP-101 10-Key Pad



Type	10-Key Pad for number entry
Function	Provides hard keys for entering numerical values, affixes to the right-hand side of the control panel. Meets Section 508 Accessibility requirements.


Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Component Considerations

FK-517 Fax Kit (Standard for C3851FS)



Communication	Super G3
Compatible Lines	PSTN, PBX
Modem Speed	2.4 kbps – 33.6 kbps
Compression	MH/MR/MMR/JBIG
Transmit Paper Size	Max. 11" x 14"
Receive Paper Size	Max. 11" x 14"
Transmission Speed	Less than 3 sec. (V.34, 33.6 Kbps, JBIG)
Scan Speed	Up to 31 opm
Transmission Size	Flatbed: 8.5" (W) x 14" (L)
	ADF: 8.5" (W) x 39" (L)
Receiving Size	Max: 8.5" (W) x 14" (L)
Fax destinations	2,100 (2,000 single + 100 group)
i-Fax	Yes
PC-Fax	Yes
Functions	Program, Select from Address Book, Group Dial Program, Auto Redial, Original Type (Text, Text/Photo, Photo), Density, Memory TX, Busy / Error Redial, Broadcast TX, Timer TX, Confidential TX, Relay TX Request, Polling RX, TX Original Size Setting, Mixed Original TX, ECM Off, V34 Off TX, Password TX, Memory RX, Memory Vicarious Execution RX, Password RX, Call Rejection, Confidential Print, Auto Reduction Print, Full Size Print, Tel/Fax Auto Switch, Audio Response, Answering Machine Connection, Number Display, Dial-in, Vicarious Execution Forward, Remote RX, Nighttime Receiving User Box Destination Setting, Activity Report, TX Result Report, Broadcast Result TX Report, Broadcast Result RX Report, Various Lists, Long Paper Original TX/RX, PC-Fax TX/RX, Mistake TX Prevention

LK-102 v3 i-Option License Kit

Type	License Key
Function	Enhanced PDF Encryption (128-bit AES Encryption), PDF/A (1a/1b) and Linearized PDF file support.

Note: The LK-110 supports the same functions as the LK-102 v3, therefore, both license kits cannot be installed on the same device.

LK-104 v3 i-Option License Kit

Type	License Key
Function	Voice Guidance

LK-105 v4 i-Option License Kit

Type	License key
Function	Provides Searchable PDF function

Note: The LK-110 supports the same functions as the LK-105 v3, therefore, both license kits cannot be installed on the same

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Component Considerations continued

device.

LK-106 i-Option License Kit

Type	License key
Function	Supports Bar Code Font Printing

LK-107 i-Option License Kit

Type	License key
Function	Supports Unicode Font Printing

LK-108 i-Option License Kit

Type	License key
Function	Supports OCR Font Printing

LK-110 v2 i-Option License Kit

Type	License Key
Function	OOXML format file conversion for docx/xlsx, Fax to searchable PDF, convert box data to compact PDF, direct print e-mail attached file. Combines LK-102 (Encrypted PDF) & LK-105 (Searchable PDF/OCR) functionality.

Note: If you install the LK-110 on a device, you cannot install the LK-102 v3 and/or LK-105 v3 on the same device.

LK-111 i-Option License Kit

Type	License Key
Function	Provides ThinPrint client support

UK-211 Memory Expansion

Type	2 GB Memory expansion
Function	Required for Registered Overlay. Also required for concurrent use of Web Browser and Stamp Print, Watermark, Date/Time Print, Header/Footer, Image Overlay, or Management Number.

EK-P05 USB Host/Local Interface

Type	USB Interface and USB Cable
Function	Required to connect optional External Keyboard (or can use EK-P06 when Bluetooth printing is also required) or optional i-Option LK-104 Voice Guidance License kit.

EK-P06 USB Host/Local Interface with Bluetooth

Type	USB Interface and USB Cable
Function	Supports Bluetooth Printing. Required to connect optional External Keyboard (or can use EK-P05 if Bluetooth printing is not required) or optional i-Option LK-104 Voice Guidance License kit.

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



KONICA MINOLTA

Mixed Original Support

● Possible × Not Possible

Document Size ²	Maximum Document Width ¹				
	8.5" x 11" portrait	8.5" x 14" landscape	8.5" x 11" landscape	5.5" x 8.5" portrait	5.5" x 8.5" landscape
8.5" x 14" (□)	×	●	●	×	×
8.5" x 11" (□)	×	●	●	×	×

¹ Indicates the width of the widest document size of the mixed originals.

² Indicates the document sizes that can be mixed together based on the maximum document width.

Standard Paper Tray Support

Main Unit - bizhub C3851FS/C3351

Component	Capacity	Size	Weight
Bypass Tray	100 sheets	4"x6" to 8.5"x14"	Up to 110 lb index*
Tray 1 (Universal Tray)	550 sheets	4"x6" to 8.5"x14"	Up to 110 lb index*

* Automatically duplexed.

Print Function (Standard)

Controller	Emperon
Power Supply	Common with the main body
CPU	MB86S73 (1.2 GHz)
Memory	4.0 GB (2 GB Std. + UK-211 installed)
HDD	250 GB (Std.)
Print Speed	C3851FS: Color: 40.0 ppm – Letter Portrait BW: 40.0 ppm – Letter Portrait C3351: Color: 35.0 ppm – Letter Portrait BW: 35.0 ppm – Letter Portrait
First Print Time	15.0 seconds or less (color & monochrome)
Print Resolution	1,200 dpi x 1,200 dpi (reduced speed)
PDL	PostScript 3 (3016), PCL5 e/c (Emulation), XPS (ver. 1.0), PCL XL Emulation (3.0), PPML/GA 2.2, PPML/VDX, OpenXPS, PDF 1.7, OOXML (docx/xlsx/ppsx)
Protocol	TCP/IP (IPv4/IPv6), SMB, LPD, IPP1.1, SNMP, HTTP, HTTPS
Support OS	Server: Windows Server 2008 (64), Windows Server 2008 R2 (64), Windows 2008 SP2, Windows Server 2012 Client: Windows Vista SP2/7SP1/8.1/10, Windows Vista (64) SP2, Macintosh OS X Ver. 10.6 or later, Red Hat Enterprise Linux 5 or later
Interface	Gigabit Ethernet (10/100/1000 Base-TX), USB 2.0, USB 2.0 Host
Fonts	PCL Residential Fonts: 80 Outline PS3 Emulating Residential Fonts: 137

Print Drivers

PCL 6 (XL 3.0) Emulation	Windows Vista/7/8.1/10/Server 2008/2012, PCL6 Printer driver, Windows Vista/Server 2008 x64 Edition, Server 2008 R2 x64 Edition, PCL6 Print Driver
PostScript 3 (3016)	Windows Vista/7/8.1/10/Server 2008/2012, Windows Vista/Server 2008 x64 Edition, Server 2008 R2 x64 Edition, PS Print Driver Macintosh OS X 10.6 or later PPD+PDE Printer Driver PPD file: for Red Hat Enterprise Linux Printer driver
XPS (ver. 1)	Windows Vista/7/8.1/10/Server 2008/2012, Windows Vista/Server 2008 x64 Edition, Server 2008 R2 x64 Edition, XPS Printer Driver

Scanning Function (Standard)

Type	Full-Color Scanner
Scanning Size	Flatbed: 8.5"(W) x 14" □ max. ADF: 8.5"(W) x 39" □ max. (≤400 dpi) 8.5"(W) x 14" □ max. (600 dpi)
Scanning Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scanning Speed	300 dpi: Up to 37 ppm ¹
Main Function	Scan-to-Email, Scan-to-SMB, Scan-to-FTP, Scan-to-USB, Scan-to-HDD, Scan-to-WebDAV, Network TWAIN Scan
Interface	Gigabit Ethernet (10/100/1000 Base-TX), USB 2.0
Protocol	TCP/IP (FTP, SMB, SMTP, WebDAV) TCP Socket WSD
Supported OS	Windows Vista(x64), Windows 7/8.1/10(x64), Windows Server 2008 (x64), Windows Server 2008 R2 (x64), Windows Server 2012 (x64), Macintosh OS X 10.6 or later
Output Format	PDF, JPEG, TIFF, XPS, Compact PDF, Encrypted PDF, PDF/A
Driver	Network TWAIN
Address Setting	LDAP

¹ Scan speed varies by resolution and amount of data being scanned.

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Network Functions

Sending the Scanned Data in an Email Message

Scanned data can be sent to a specified Email address. The destination is specified from the control panel of this machine, and the scanned data is sent as an Email attachment.

Sending the Scanned Data as Files (FTP)

Scanned data is uploaded to a specified FTP server. The FTP server address, login password, and other information are entered from PageScope Web Connection.

Sending the Scanned Data to a Computer on the Network (SMB)

Scanned data can be sent to a shared folder on a specified computer. The name of the destination computer, login password, and other information are entered from PageScope Web Connection.

Sending the Scanned Data to a USB Thumb Drive

Scanned data can be sent to a USB thumb drive inserted into the USB 2.0 Host Port on the side of the machine.

Sending the Scanned Data to the built-in HDD

Scanned data can be saved to the 320 GB HDD.

Sending the Scanned Data to WebDAV

Scanned data is uploaded to a specified web server. The host name, file path, user name and password are entered on the touch panel of the machine. The data files uploaded to the server can be downloaded from a computer on the network.

Connecting to the bizhub C3851FS/C3351 Wirelessly

The standard Wireless Network Interface can be used to connect to a wireless router, eliminating the need for a network cable to the machine. Or it can be configured to act as an access point for direct wireless communication with Android and iOS mobile devices.

Fax Function (Standard: C3851FS; Option: C3351)

Communication	Super G3
Compatible Lines	Public Switched Telephone Network, PBX
Line Density	Fine: 200 x 200 dpi Super Fine: 400 x 400 dpi Ultra Fine: 600 x 600 dpi
Modem Speed	33.6 Kbps
Compression	MH/MR/MMR/JBIG
Transmit Paper Size	Up to 8.5" to 14" (Flatbed) Up to 8.5" to 39" (ADF)
Receive Paper Size	Up to 8.5" to 14"
Transmission Speed	Approx. 3 seconds
Speed	Up to 37 ppm

Finisher Function (Standard: C3851FS)

Type	Inner Stapler Finisher
Output Tray	Output Tray 1
Staple Mode	Corner Front
Mode	Sort/Group (250 sheets) Offset Sort/Group (250 sheets) Staple (250 sheets or 25 sets)
Paper Type	Plain, Recycled, Letterhead
Consumable	SK-602 Staples (5,000 staples x3)

PageScope Software

Network & Device Management

PageScope Net Care Device Manager
PageScope Data Administrator
Driver Packaging Utility
PageScope Download Manager

User Tools

PageScope Print Status Notifier
PageScope Mobile (Android, iPhone, Windows)

Management Tools

bizhub vCare
bizhub Remote Panel

Optional Software

PageScope Enterprise Suite
▶ PageScope Account Manager
▶ PageScope Authentication Manager
▶ MyPrint Manager

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



KONICA MINOLTA

Security

Because information assets are critical, a company needs to effectively protect against the many security risks it faces.

- 1) Prevent Leaks of proprietary, confidential or personal information
- 2) Prevent unauthorized use of equipment
- 3) Effective data encryption
- 4) Protect data from being altered, duplicated or deleted
- 5) Prevent unauthorized access to data via the Internet
- 6) Protect against cyber attacks
- 7) Manage log history

Protective Functions:

- HDD Overwrite — Overwrite Data (choose from 8 modes)
- Secure Print (when printing confidential documents)
- Protect data by requiring department name and 8-digit password
- Account Track
- Prevent Unauthorized Use
- HDD Encryption
- PDF Scan Encryption
- Copy Protection (Print only)
- Network Authentication
- SSL/TSL Compatibility for PS Web Connection, PS Data Administrator and LDAP Server
- Scan Data Encryption (TCP/socket SSL Compatibility)
- LDAP Authentication
- IP Address Filtering
- HID Authentication Card Unit (Optional)
- IPv6
- Allow/Restrict USB Memory Printing/Scanning
- Secure Print

Paper Considerations

Paper Size Conversion Chart

Paper	Letter	Legal	Statement	Custom
Measurement	8.5" x 11"	8.5" x 14"	5.5" x 8.5"	3.6"(W)x5.8"(L) to 8.5"(W)x 14"(L)

Paper Weight Conversion Chart

gsm	Bond	Offset	Cover	Tag	Index	Point	Bristol	Caliper	
								inches	mm
60.20	16	40	22	37	33	3.2	27.4	0.0032	0.081
67.72	18	45	24	41	37	3.6	30.9	0.0036	0.092
75.20	20	50	28	46	42	3.8	34.3	0.0038	0.097
90.30	24	60	33	56	50	4.8	41.2	0.0048	0.120
105.35	28	70	39	64	58	5.8	48.1	0.0058	0.147
109.11	29	73	40	62	60	6.0	49.8	0.0060	0.152
116.63	31	81	45	73	66	6.1	53.2	0.0061	0.155
131.68	35	90	48	80	74	6.2	60.1	0.0062	0.157
135.45	36	90	50	82	75	6.8	61.8	0.0068	0.173
146.73	39	100	54	90	81	7.2	67.0	0.0072	0.183
150.50	40	100	56	93	83	7.3	68.7	0.0073	0.185
161.78	43	110	60	100	90	7.4	73.8	0.0074	0.188
165.55	44	110	61	102	92	7.6	75.5	0.0076	0.193
176.83	47	120	65	108	97	8.0	80.7	0.0078	0.198
199.41	53	135	74	122	110	9.0	91.0	0.0085	0.216
203.17	54	137	75	125	113	9.0	92.7	0.0090	0.229

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Paper Type Specifications

Normal (Plain Paper)

Normal paper is for general use. Normal paper is usually not a recycled paper.

Thick Paper 1

Thick Paper 1 is paper weighing between 91 to 120 gsm. It can be fed via Bypass Tray or Tray 1 (Universal Tray).

Thick Paper 1+

Thick Paper 1+ is paper weighing between 121 to 157 gsm. It can be fed via Bypass Tray or Tray 1 (Universal Tray).

Thick Paper 2

Thick Paper 2 is paper weighing between 40 to 55.5 lb bond. It can be fed via Bypass Tray or Tray 1 (Universal Tray) (Up to 20 sheets).

Envelopes

Envelopes can be fed through the Bypass Tray (Up to 10 sheets) or Tray 1 (Universal Tray – up to 30 sheets).

Recommended Media

Plain Paper (Color)	CF Paper 80, Hammermill Laser Print, New Radiant White 90
Plain Paper (Monochrome)	Hammermill Tidal MP (20 lb = 75 gsm)
Recycle Paper	Domtar Recycled Copy (20 lb = 75 gsm)
Thick Paper (1, 1+, 2)	Hammermill Color Copy Paper 32 lb (120 gsm) Color Copy Cover 60 lb (163 gsm)
Glossy Paper	POD 128 gsm Gloss Coat
Envelope	C10 (105 x 240 mm) Open End Envelopes OE1024911 Paper Presentation Open End #10 Envelope Monarch (98 x 190 mm) Kentwove 43539 SUB.23 Kentwove 70944 SUB.24

NOTE: Please log onto mykonicaminolta.com for updates on paper recommendations. You can find updates in the latest Specifications and Installation Guide or the latest Media Guide.

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



KONICA MINOLTA

How to Build a bizhub C3851FS/C3351 System (from start to finish)

Step 1: Base Unit

- **C3851FS Digital Color Printer/Copier/Scanner/Fax/Finisher**
Includes PS, PCL & XPS Controller, 4 GB Memory*, 250 GB HDD, Standard Wireless Connectivity and Web Browser, Standard Super G3 Fax, Standard Gigabit Ethernet, Duplex Unit, Stapler Finisher, 50-sheet Automatic Duplex Document Feeder, Standard USB 2.0 (supports local printing), CMYK Toner (Yield: 12K/13K) and Imaging Units.
- **C3351 Digital Color Printer/Copier/Scanner**
Includes PS, PCL & XPS Controller, 4 GB Memory*, 250 GB HDD, Standard Wireless Connectivity and Web Browser, Standard Gigabit Ethernet, Duplex Unit, 50-sheet Automatic Duplex Document Feeder, Standard USB 2.0 (supports local printing), CMYK Toner (Yield: 12K/13K) and Imaging Units.

Step 2: Paper Handling Options

- PF-P13 Paper Feed Unit (500 sheets, maximum 2)
- DK-P03 Copy Desk

Step 3: Finishing Options

- In-Line Stapler (Standard/C3851FS Only)
- FS-P03 Off-Line Stapler
- CS-1 Convenience Stapler

Step 4: Additional Options

- AU-205H IC Card Reader**
- MK-P02 Mount Kit for Card Readers
- EK-P05 USB Connection Kit
- EK-P06 USB Connection Kit – Bluetooth
- KP-101 10-Key Pad
- FK-517 Fax Kit (Option for C3351 only)
- WT-P02 Working Table
- LK-102 v3 – Enhanced PDF Encryption, PDF/A (1a/1b) and Linearized PDF support
- LK-104 v3 – Voice Guidance
- LK-105 v4 – Searchable PDF
- LK-106 – Barcode Font Printing
- LK-107 – Unicode Font Printing
- LK-108 – OCR Font Printing
- LK-110 v2 – OOXML file conversion, Enhanced Image Data, Combines LK-102 & LK-105 functionality
- LK-111 – ThinPrint® Client Support
- UK-211 Expanded Memory Unit (Required for full functionality)



* 2GB Std. + UK-211 installed.
** WT-P02 or MK-P02 required for mounting.

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Accessory Options for bizhub C3851FS/C3351 Digital Color Printer/Copier/Scanner/Fax

ITEM	ITEM NO.	DESCRIPTION	NOTES
BASE UNIT			
bizhub C3851FS*	A92G011X011	Digital Color Printer/Copier/Scanner/Fax/Finisher	Includes PS, PCL & XPS Controller, 4 GB Standard Memory when UK-211 is installed, 250 GB HDD, Standard Wireless Connectivity and Web Browser, Standard Super G3 Fax, Standard Gigabit Ethernet, Duplex Unit, Stapler Finisher, 50-sheet Automatic Duplex Document Feeder, Standard USB 2.0 (supports local printing), CMYK Toner (Yield: 12K/13K) and Imaging Units.
bizhub C3351*	A92F011X011	Digital Color Printer/Copier/Scanner	Includes PS, PCL & XPS Controller, 4 GB Standard Memory when UK-211 is installed, 250 GB HDD, Standard Wireless Connectivity and Web Browser, Standard Gigabit Ethernet, Duplex Unit, 50-sheet Automatic Duplex Document Feeder, Standard USB 2.0 (supports local printing), CMYK Toner (Yield: 12K/13K) and Imaging Units.
PAPER HANDLING OPTIONS			
DK-P03	9967002766	Copy Desk	Adds storage and mobility. Brings MFP up to working height.
PF-P13	A4Y6WY2	Paper feed unit	Lower feeder unit adds 500 sheets of paper capacity (8.5" x 11" or 8.5" x 14"). Add up to 2. Total paper capacity: 1,650 sheets.
FINISHING OPTIONS			
CS-1	7640013463	Convenience Stapler	Standalone electronic stapler.
FS-P03	A6VDWY1	Stapler	Provides 20-sheet corner stapling off-line finisher.
ADDITIONAL OPTIONS			
AU-205H	R5427000136466	IC Card Reader	Allows access to the MFP via HID Proximity Cards. Working table recommended. Supports IC card types.
EK-P05	A9FVWY1	Local USB Interface Kit	Required to connect optional external keyboard and supports Voice Guidance functions available with optional LK-104 v3.
EK-P06	A9FRWY1	Local USB Interface Kit	Required to connect optional external keyboard, provides bluetooth printing support for mobile phone link and supports Voice Guidance functions available with optional LK-104 v3.
FK-517	AA1K011	Fax Kit	Adds Super G3 fax functionality for the bizhub C3351 (standard for the bizhub C3851FS).
KP-101	A64TWY3	10-Key Pad	Optional 10 Key Pad. Affixes to the right-hand side of the control panel.
LK-102 v3	A0PD016	i-Option License Kit	Enables 128-bit AES PDF encryption; PDF File and password are encrypted; provides PDF/A (1a/1b) and Linearized PDF file format support. Requires UK-211 Memory Upgrade. Please note that the LK-110 supports the same functions as the LK-102 v3, therefore, both license kits cannot be installed on the same device.
LK-104 v3	A0PD017	i-Option License Kit	Provides Voice Guidance functionality. Requires UK-211 Memory Upgrade.
LK-105 v4	A0PD01T	i-Option License Kit	Provides Searchable PDF functionality. Requires UK-211 Memory Upgrade. Please note that the LK-110 supports the same functions as the LK-105 v3, therefore, both license kits cannot be installed on the same device.
LK-106	A0PD019	i-Option License Kit	Provides Bar Code Font printing support. Requires UK-211 Memory Upgrade.
LK-107	A0PD01F	i-Option License Kit	Provides Unicode Font printing support. Requires UK-211 Memory Upgrade.
LK-108	A0PD01G	i-Option License Kit	Provides OCR Font printing support. Requires UK-211 Memory Upgrade.
LK-110 V2	A0PD01U	i-Option License Kit	Provides DOCX, XLSX format file conversion, Fax to searchable PDF, convert print data in box to compact PDF, combines LK-102 (encrypted PDF) & LK-105 (searchable PDF/OCR) functionality. Requires UK-211 Memory Upgrade. Please note that if you install the LK-110 on a device, you cannot install the LK-102 v3 and/or LK-105 v3 on the same device.
LK-111	A0PD01K	i-Option License Kit	Provides ThinPrint client support.
MK-P02	A732WY1	Mount Kit	Internal mount kit for AU-201H or AU-202H HID Card Authentication Units. Required if card readers are not mounted using the WT-P02 Working Table.
WT-P02	A6VCWY2	Working Table	Recommended for use with FS-P03, CS-1 or Authentication Units.

* Please refer to specific channel price book for accurate item numbers. Item numbers may differ by channel.

Konica Minolta bizhub C3851FS/C3351

Specification & Installation Guide



Accessory Options for bizhub C3851FS/C3351 Digital Color Printer/Copier/Scanner/Fax

CONSUMABLE YIELDS*

CONSUMABLE	ITEM NO.	YIELD
Toner – C	A95W430	12,000
Toner – M	A95W330	12,000
Toner – Y	A95W230	12,000
Toner – K	A95W130	13,000
Imaging Unit – C	A95X0HD	50,000
Imaging Unit – M	A95X0CD	50,000
Imaging Unit – Y	A95X06D	50,000
Imaging Unit – K	A95X01D	60,000
Waste Toner Bottle	A4Y5WY1	36,000
Staples SK-501 (For Standard Finisher)	A6Y8WY1	1,000 x 3 pkg/case
Staples SK-602 (For FS-P03 Finisher)	14YK	5,000 x 3 pkg/case

* Based on 20% total coverage.